

PLATINUM 铂越计重系列 BY-S/Z/K

- 内部解析度高达30万分之一
Internal resolution up to 1/300,000
- 内藏可充电电池，交直流两用
Built-in rechargeable battery, AC and DC
- 全量程去皮功能
Full range tare function
- 标配RS232数据输出功能
RS232 interface to connect multiple devices

大屏幕LED绿色显示，清晰易读
High contrast large LCD display (green backlight)



电力不足时有明确的低电压显示，且有双色LED灯充电指示，可清楚了解充电情况
Clear low-voltage alarm and charging indication with dual color LED lights, which can clearly understand the charging status.

具有kg、g、lb等单位选择及计数功能
Optional weighing unit: kg/g/lb etc, counting function

天平型号 / Model	量程 / Capacity	可读性 / d	秤盘尺寸 / Plate size	外形尺寸 / Dimensions	包装盒尺寸 / Packing size
BY-R300S	3kg/0.1g	100mg	255×300mm	315×300×115mm	445×355×150mm
BY-R600S	6kg/0.1g	100mg			
BY-R1500Z	15kg/0.5g	500mg			
BY-R3000K	30kg/1g	1000mg			
BY-R1000S	10kg/0.1g	100mg			
BY-R2000S	20kg/0.1g	100mg			
BY-R3000S	30kg/0.1g	100mg			

JEWELRY SPECIFIC ACCESSORIES 珠宝专用配件

Precision weighing pan 精密称重盘

CPPZ0001



- L总长: 115MM
- HT高度: 45MM
- DIA直径: 90MM

CPPZ0002



CPPZ0003



- L总长: 130MM
- HT高度: 20MM
- DIA直径: 80MM

专业 | 创新 | 卓越 | 服务一流


Professional innovation service

✉ 邮箱/Email: info@stuccler.com

🌐 网页/Wbe: www.stuccler.com



扫码了解更多

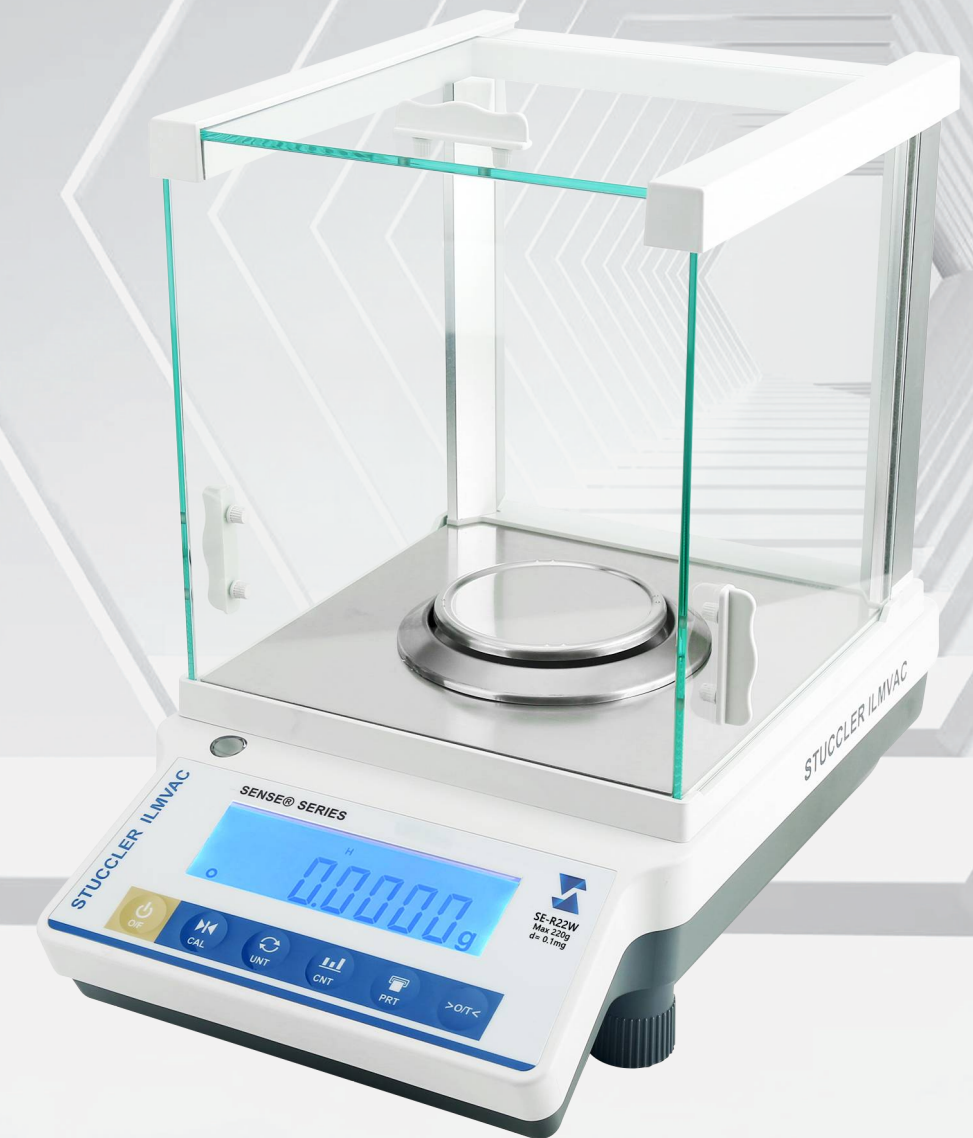

斯图克勒（福建）电子仪器有限公司
STUCCLER ILMVAC ELECTRONIC INSTRUMENT CO.,LTD

监制 伊尔姆（德国）电子仪器有限公司

热线电话Tel: 400 069 6809


SHINE闪耀系列 SH-Q/B/S

- 应变式质量传感器
Loadcell sensor
- 外部校准
External calibration
- LCD背光液晶显示屏
LCD display
- 六级防震可调功能
Six level earthquake adjustable function

- ABS外壳
ABS shell
- 配置RS232+USB端口
Configure the RS232+USB port
- 称重稳定时间可调功能
Weighing stability time adjustable function
- 称重模式自动锁定
The weighing mode is automatically locked

- 可选配大容量锂电池
Optional Li-Battery
- 具有g mg ct oz等多种单位可选
With G, mg, CT, OZ and other units available
- 标配多功能适配器
Standard multifunctional adaptor

SH-1.1

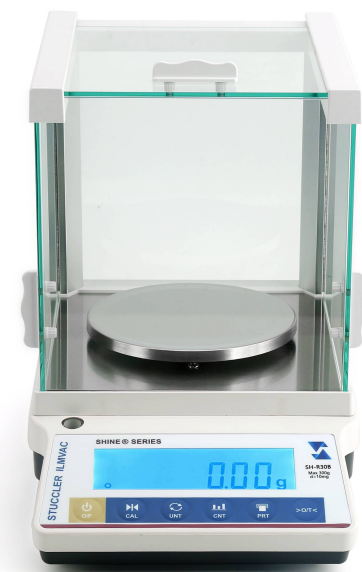

SH-1.3



SH-1.2




SENSE运筹系列 SENSE-JD运筹珠宝系列 SE-Q/JD-Q

- 电磁力精密传感器
Electromagnetic sensor
- 全自动内部校准
(根据温度变化和时间, 将自动校准保存精度)
Internal calibration calibration
Temperature and time changes
maintain accuracy
- 六级防震可调功能
Six level earthquake adjustable function

- 配置下挂钩称量装置
Equipped with lower hook weighing device
- 称重稳定时间可调功能
Weighing stability time adjustable function
- 称重模式自动锁定
The weighing mode is automatically locked

底部全铝+ABS
ABS+Aluminum bottom shell

配置RS232+USB端口
Configure the RS232+USB port

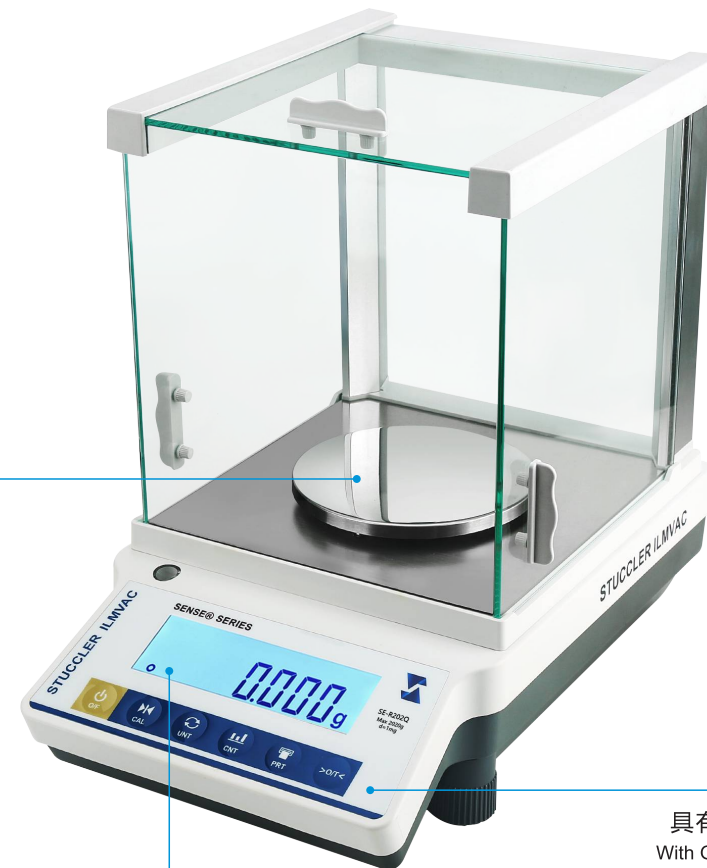

具有g mg ct oz等多种单位可选
With G, mg, CT, OZ and other units available

LCD背光液晶显示屏
LCD display


天平型号 / Model	量程 / Capacity	可读性 / d	秤盘尺寸 / Plate size	使用温度 / Temp.	外形尺寸 / Dimensions
SE-R102Q	1020g	1mg	φ120mm	18-23°C	340×215×315mm
SE-R152Q	1520g				
SE-R202Q	2020g				
JD-R102Q	1020g/5100ct				
JD-R152Q	1520g/7600ct				
JD-R202Q	2020g/10100ct				

SENSE运筹系列 SE-W/Q



- 配置下挂钩称量装置
Equipped with lower hook weighing device
- 称重稳定时间可调功能
Weighing stability time adjustable function
- 称重模式自动锁定
The weighing mode is automatically locked
- 具有g mg ct oz等多种单位可选
With G, mg, CT, OZ and other units available
- LCD背光液晶显示屏
LCD display

SENSE运筹珠宝系列 JD-W/Q

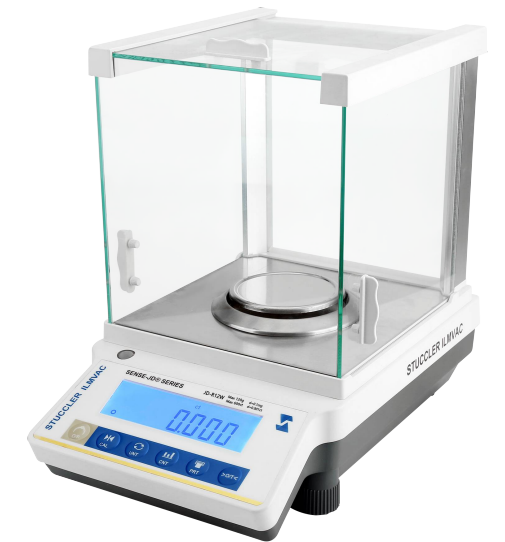

- 电磁力精密传感器
Electromagnetic sensor
- 全自动内部校准
(根据温度变化和时间, 将自动校准保存精度)
Internal calibration calibration
Temperature and time changes
maintain accuracy
- 六级防震可调功能
Six level earthquake adjustable function
- 底部全铝+ABS
ABS+Aluminum bottom shell
- 配置RS232+USB端口
Configure the RS232+USB port

图例 / Image	天平型号 / Model	量程 / Capacity	可读性 / d	秤盘尺寸 / Plate size	使用温度 / Temp.	外形尺寸 / Dimensions		
SH-1.1	SH-R10Q	100g	1mg	φ90mm	15-30°C	310×200×270mm		
	SH-R20Q	200g						
	SH-R30Q	300g						
	SH-R30B	300g	10mg	φ130mm	5-35°C			
	SH-R50B	500g						
	SH-R60B	600g						
SH-1.2	SH-R100B	1000g	10mg	φ130mm	5-35°C	310×200×95mm		
	SH-R150B	1500g						
	SH-R150B	1500g						
	SH-1.3	SH-R200B	2000g	10mg	φ180mm×180mm		5-35°C	310×200×270mm
		SH-R300B	3000g					
		SH-R200S	2000g					
SH-R300S		3000g	100mg	15-30°C				
SH-R500S		5000g						
SH-R600S		6000g						
	SH-R1200S	12000g						
	SH-R1500S	15000g						
	SH-R2000S	20000g						

天平型号 / Model	量程 / Capacity	可读性 / d	秤盘尺寸 / Plate size	使用温度 / Temp.	外形尺寸 / Dimensions
SE-R12W	120g	0.1mg	φ90mm	18-23°C	340×215×315mm
SE-R22W	220g				
SE-R32W	320g				
SE-R22Q	220g	1mg	φ120mm	15-30°C	
SE-R32Q	320g				
SE-R52Q	520g				
SE-R62Q	620g				
JD-R12W	120g/600ct	0.1mg	φ90mm	18-23°C	340×215×315mm
JD-R22W	220g/1100ct				
JD-R32W	320g/1600ct				
JD-R22Q	220g/1100ct	1mg	φ120mm	15-30°C	
JD-R32Q	320g/1600ct				
JD-R52Q	520g/2600ct				
JD-R62Q	620g/3100ct				